

TYPE	DucoSun 150CF Verticaal	
BESCHRIJVING	Extern permanent zonweringsysteem	
VORM LAMEL	150CF	
LAMELSTAP	190 mm	
LAMELHOOGTE	117,4 mm	
LAMELDIEPTE	105 mm	
LAMEL HOEK	45°	
INBOUWDIEPTE	met draagprofiel 50/125236 mm met draagprofiel 50/50183 mm met draagprofiel 30/50174 mm met draagprofiel 50/50161 mm met draagprofiel 30/50161 mm met draagprofiel 21/50 MULTI161 mm met draagprofiel 50/12123 mm	
MAX. LENGTE LAMEL	6000 mm	
MAX. OVERSPANNING	2515 mm @ 800Pa	
MATERIAAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profiel dikte : min. 1,3mm Kunststof onderdelen : Lamelhouders Polyamide PA 6.6 - glasvezelversterkt	
OPPERVLAKTE BEHANDELING	- naturel geanodiseerd (15-20µm) volgens Qualanod - gemoffeld polyester poedercoating (60-80µm) volgens Qualicoat Seaside type A - specifieke RAL codes en/of structuurlak op aanvraag	
OPTIES	- afdekdop (kunststof)	



3

2

1

D

D




C

C


B

B

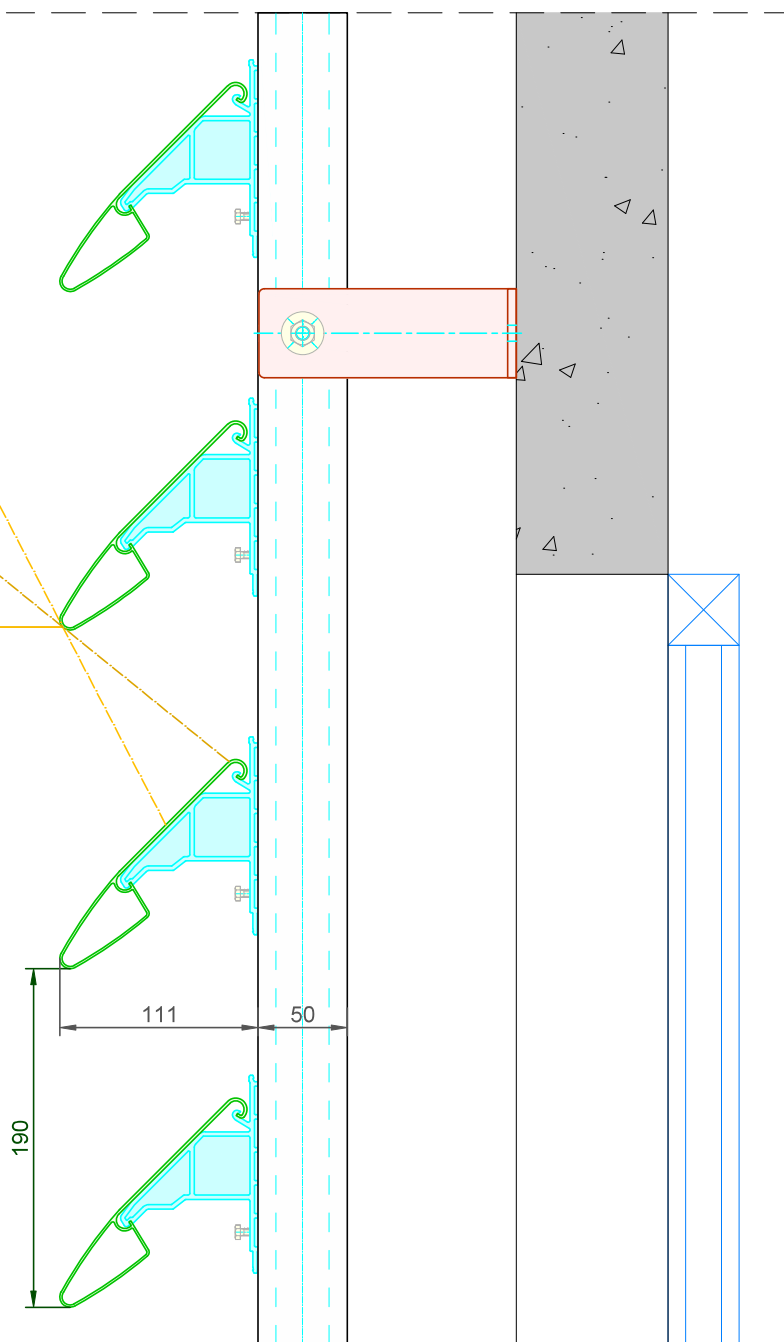

A

A

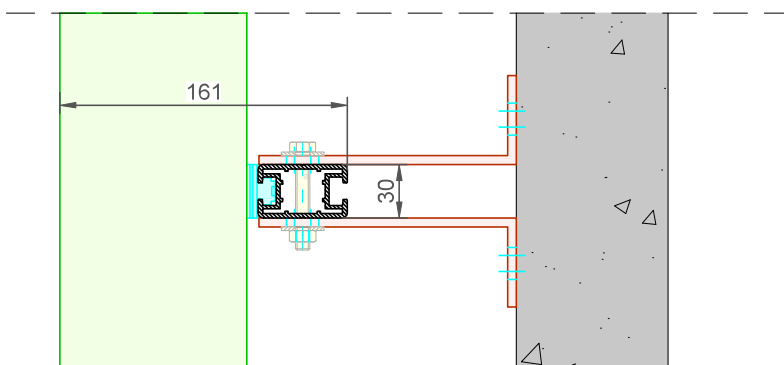DucoSun Vertical **Blade 150CF** Mullion 30/50

Date : 12/09/2024

Scale: 1:3

DUCO
Ventilation & Sun ControlBedrijvenlaan 2 - 8630 VEURNE
tel. 0032-58/330066 - fax.0032-58/330067
email: info@duco.eu www.duco.eu

This drawing is the property of Duco Projects NV and cannot be copied or shown to a third party without prior written authorisation from Duco Projects NV.

Tol. : ISO 2768-mK

Draftsman: SVE

Mat. :

Ref nr. :

Format : A3



outline:

weight:

coat. surf:

mm

kg/m

dm²/m

DucoSun Verticaal - C&D - 150CF DP 30-50

3

2

1