





TECHNICAL DATA SHEET

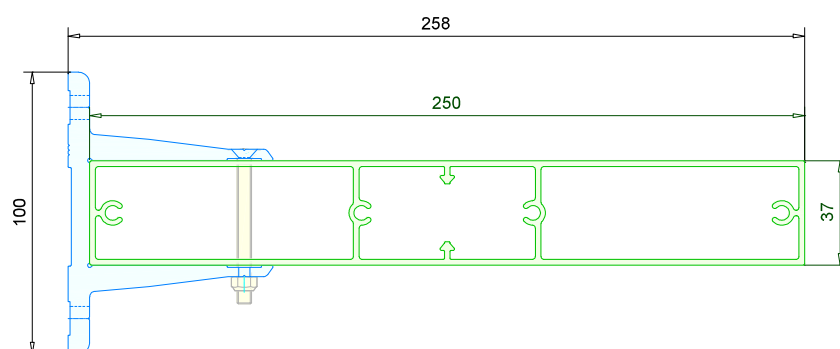

TYPE	DucoSun Cubic 250x37 - UNIFIT 0°
DESCRIPTION	External permanent solar shading system with fixed blades
SHAPE OF BLADE	Rectangular louvre blade
DIMENSIONS	250 mm x 37 mm
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5 mm
ANGLE OF BLADE	0°
PITCH OF BLADE (S)	To be determined according to project
MAX. SPAN	4350 mm @ 800Pa
COVERPLATES	Aluminium lasered coverplates - thickness 3 mm (AlMgSi0,5)
UNIFIT	Aluminium extruded bracket - width 40 mm (EN AW6063-T66 (F25))
FIXATION BLADE	Countersunk bolt M5x55 DIN7991 (AISI 304), through blade
FIXATION COVERPLATE	Self-tapping countersunk bolt M6x30 DIN7500-MZ (AISI 304)
FIXATION UNIFIT	On Duco mullion or directly against the underlying structure. (Ø8,5)
REACTION TO FIRE	A2-s1,d0 (EN13501-1)
SURFACE TREATMENT	- Standard aluminium anodised (15-20µm) according Qualanod - Polyester powder coated (60-80µm) according Qualicoat Seaside type A

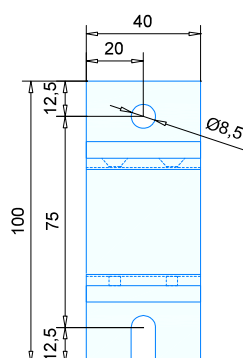

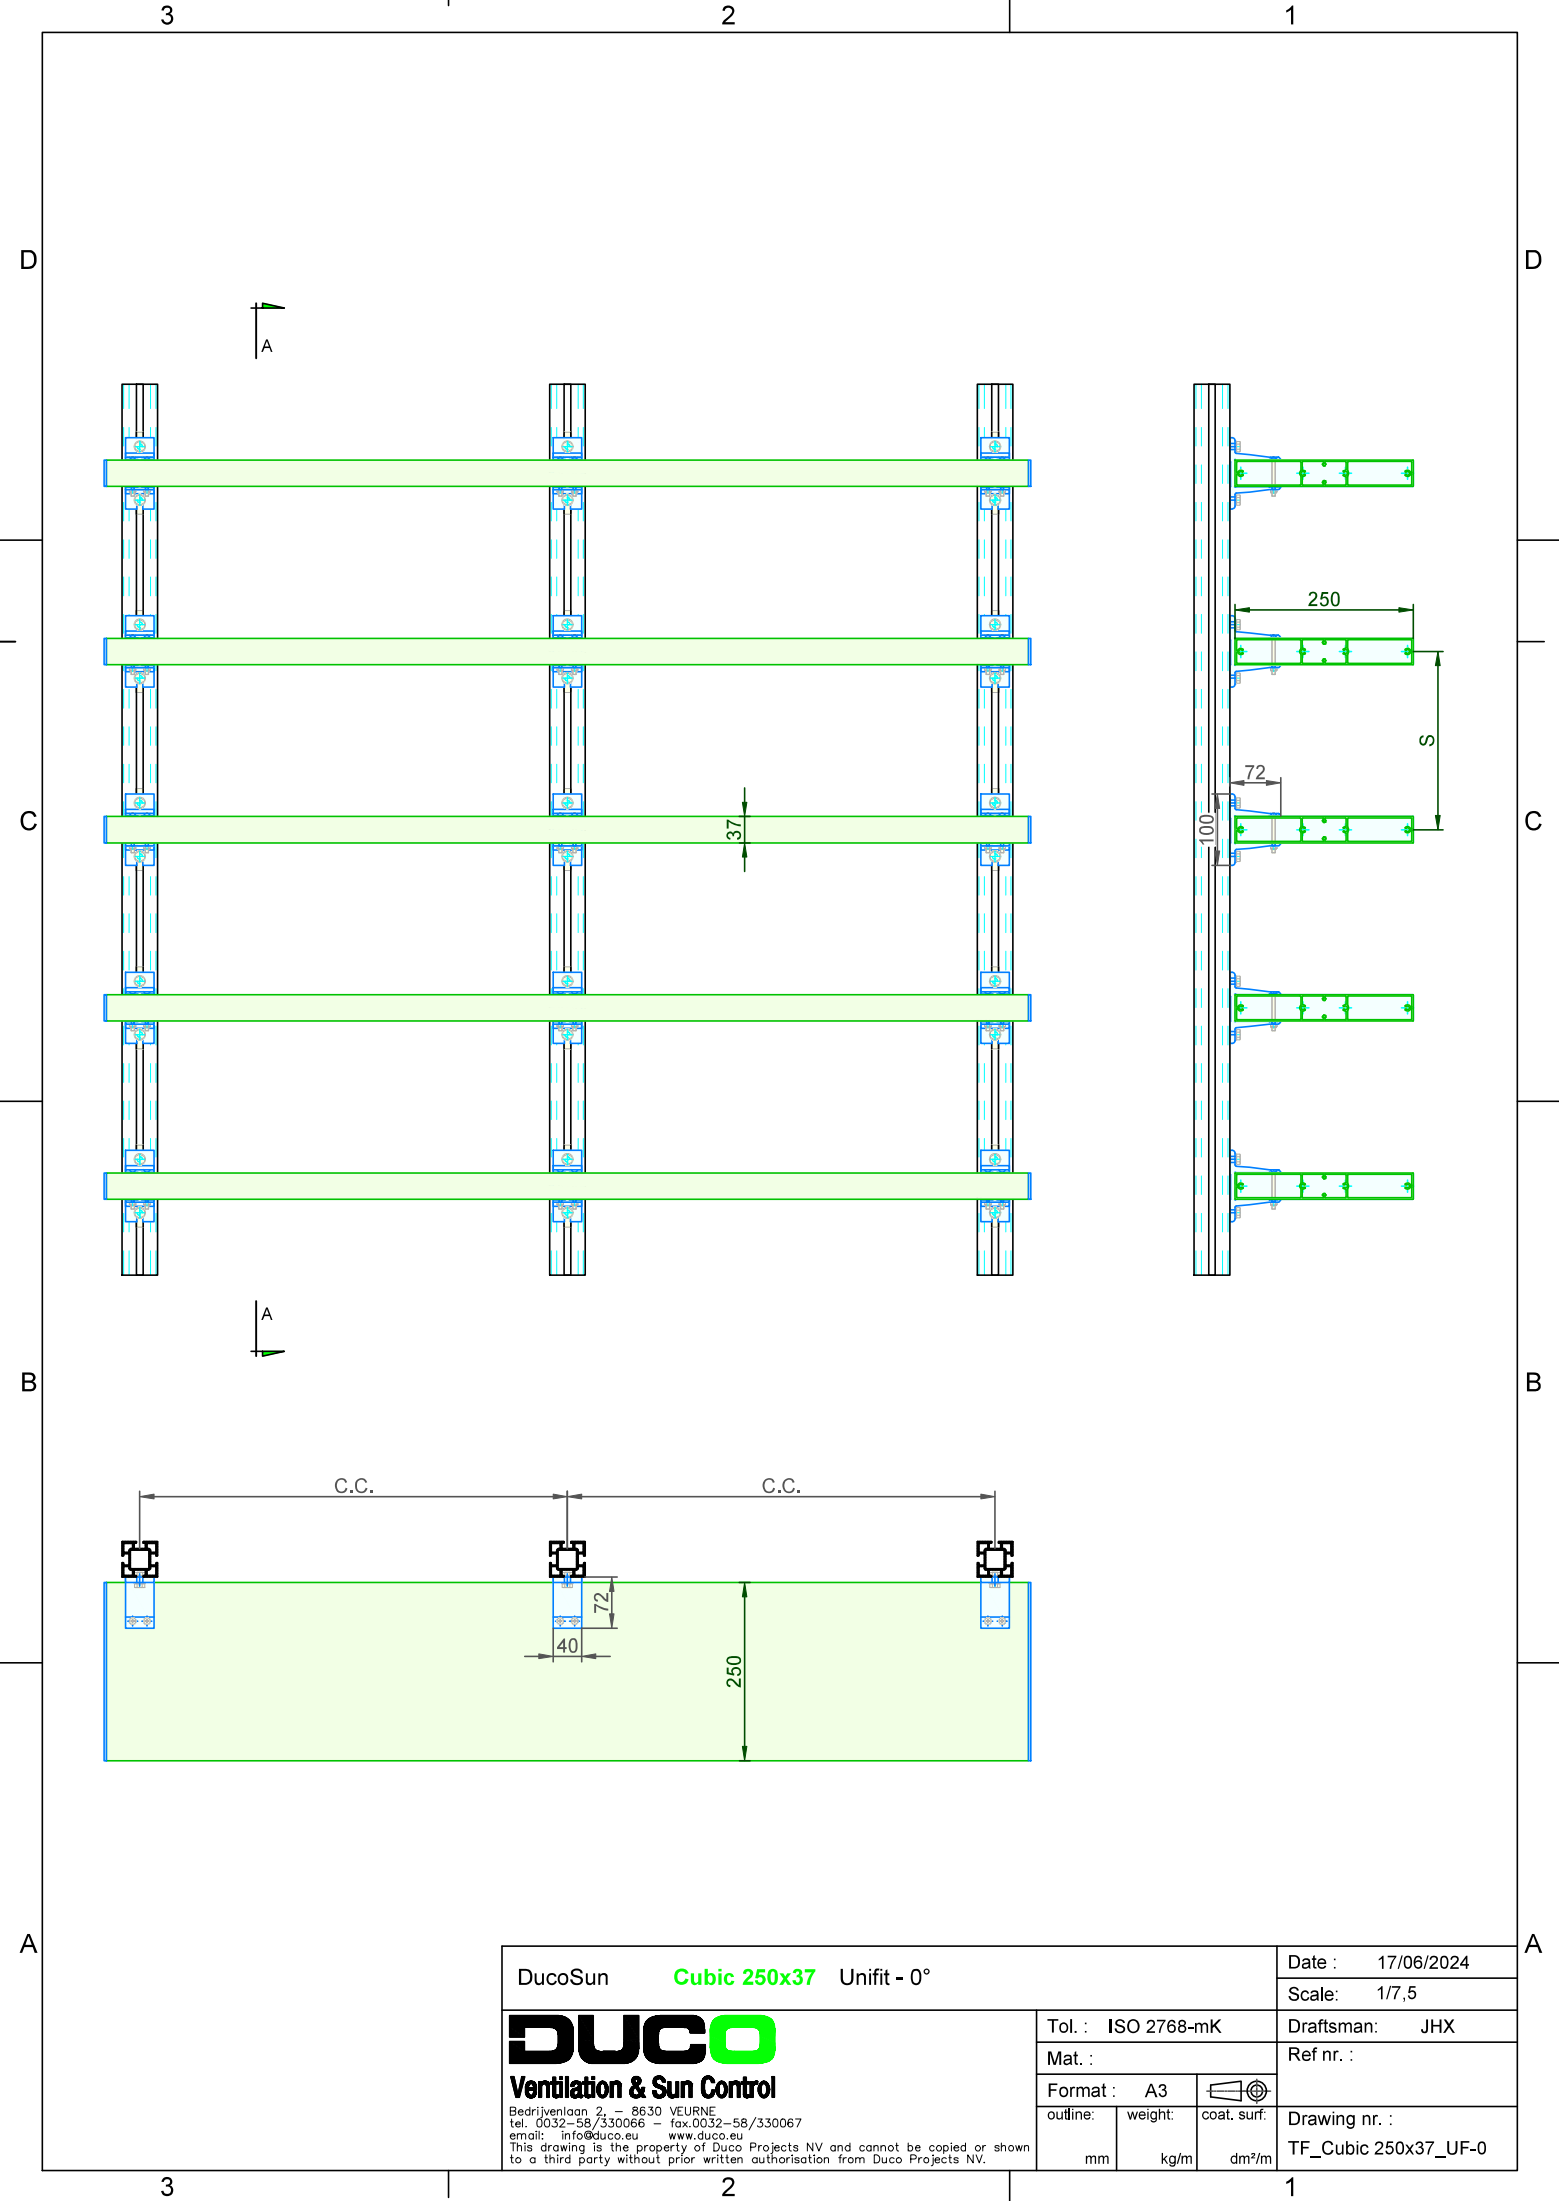

DucoSun				Cubic 250x37		Unifit - 0°		Date : 17/06/2024			
								Scale: 1/7,5			
DUCO Ventilation & Sun Control Bedrijvenlaan 2, – 8630 VEURNE tel. 0032-58/330066 – fax.0032-58/330067 email: info@duco.eu www.duco.eu This drawing is the property of Duco Projects NV and cannot be copied or shown to a third party without prior written authorisation from Duco Projects NV.								Tol. : ISO 2768-mK		Draftsman: JHX	
								Mat. :		Ref nr. :	
								Format : A3			
								outline:	weight:	coat. surf:	
								mm	kg/m	dm²/m	
								Drawing nr. : TF_Cubic 250x37_UF-0			