



TECHNICAL DATA SHEET



TYPE	DucoSun Cubic 300x50 Light - Coverplate 0°
DESCRIPTION	External permanent solar shading system with fixed blades
SHAPE OF BLADE	Rectangular louvre blade
DIMENSIONS	300 mm x 50 mm
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5 mm
ANGLE OF BLADE	0°
PITCH OF BLADE (S)	To be determined according to project
MAX. SPAN	4250 mm @ 800Pa
COVERPLATES	Aluminium lasered coverplates - thickness 5 mm (AlMgSi0,5)
FIXATION BLADE	Self-tapping countersunk bolt M6x30 DIN7500-MZ (AISI 304)
FIXATION COVERPLATE	On Duco mullion or directly against the underlying structure. (Ø9)
REACTION TO FIRE	A2-s1,d0 (EN13501-1)
SURFACE TREATMENT	- Standard aluminium anodised (15-20µm) according Qualanod - Polyester powder coated (60-80µm) according Qualicoat Seaside type A

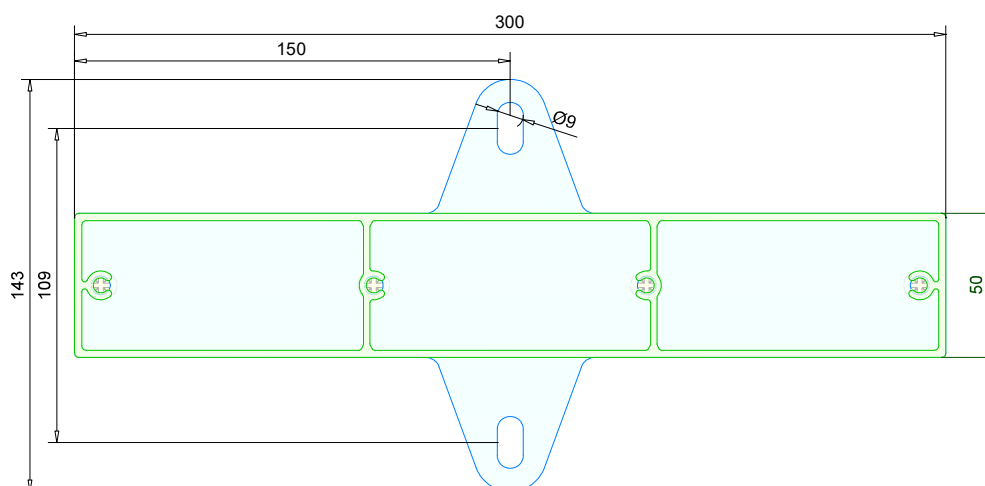

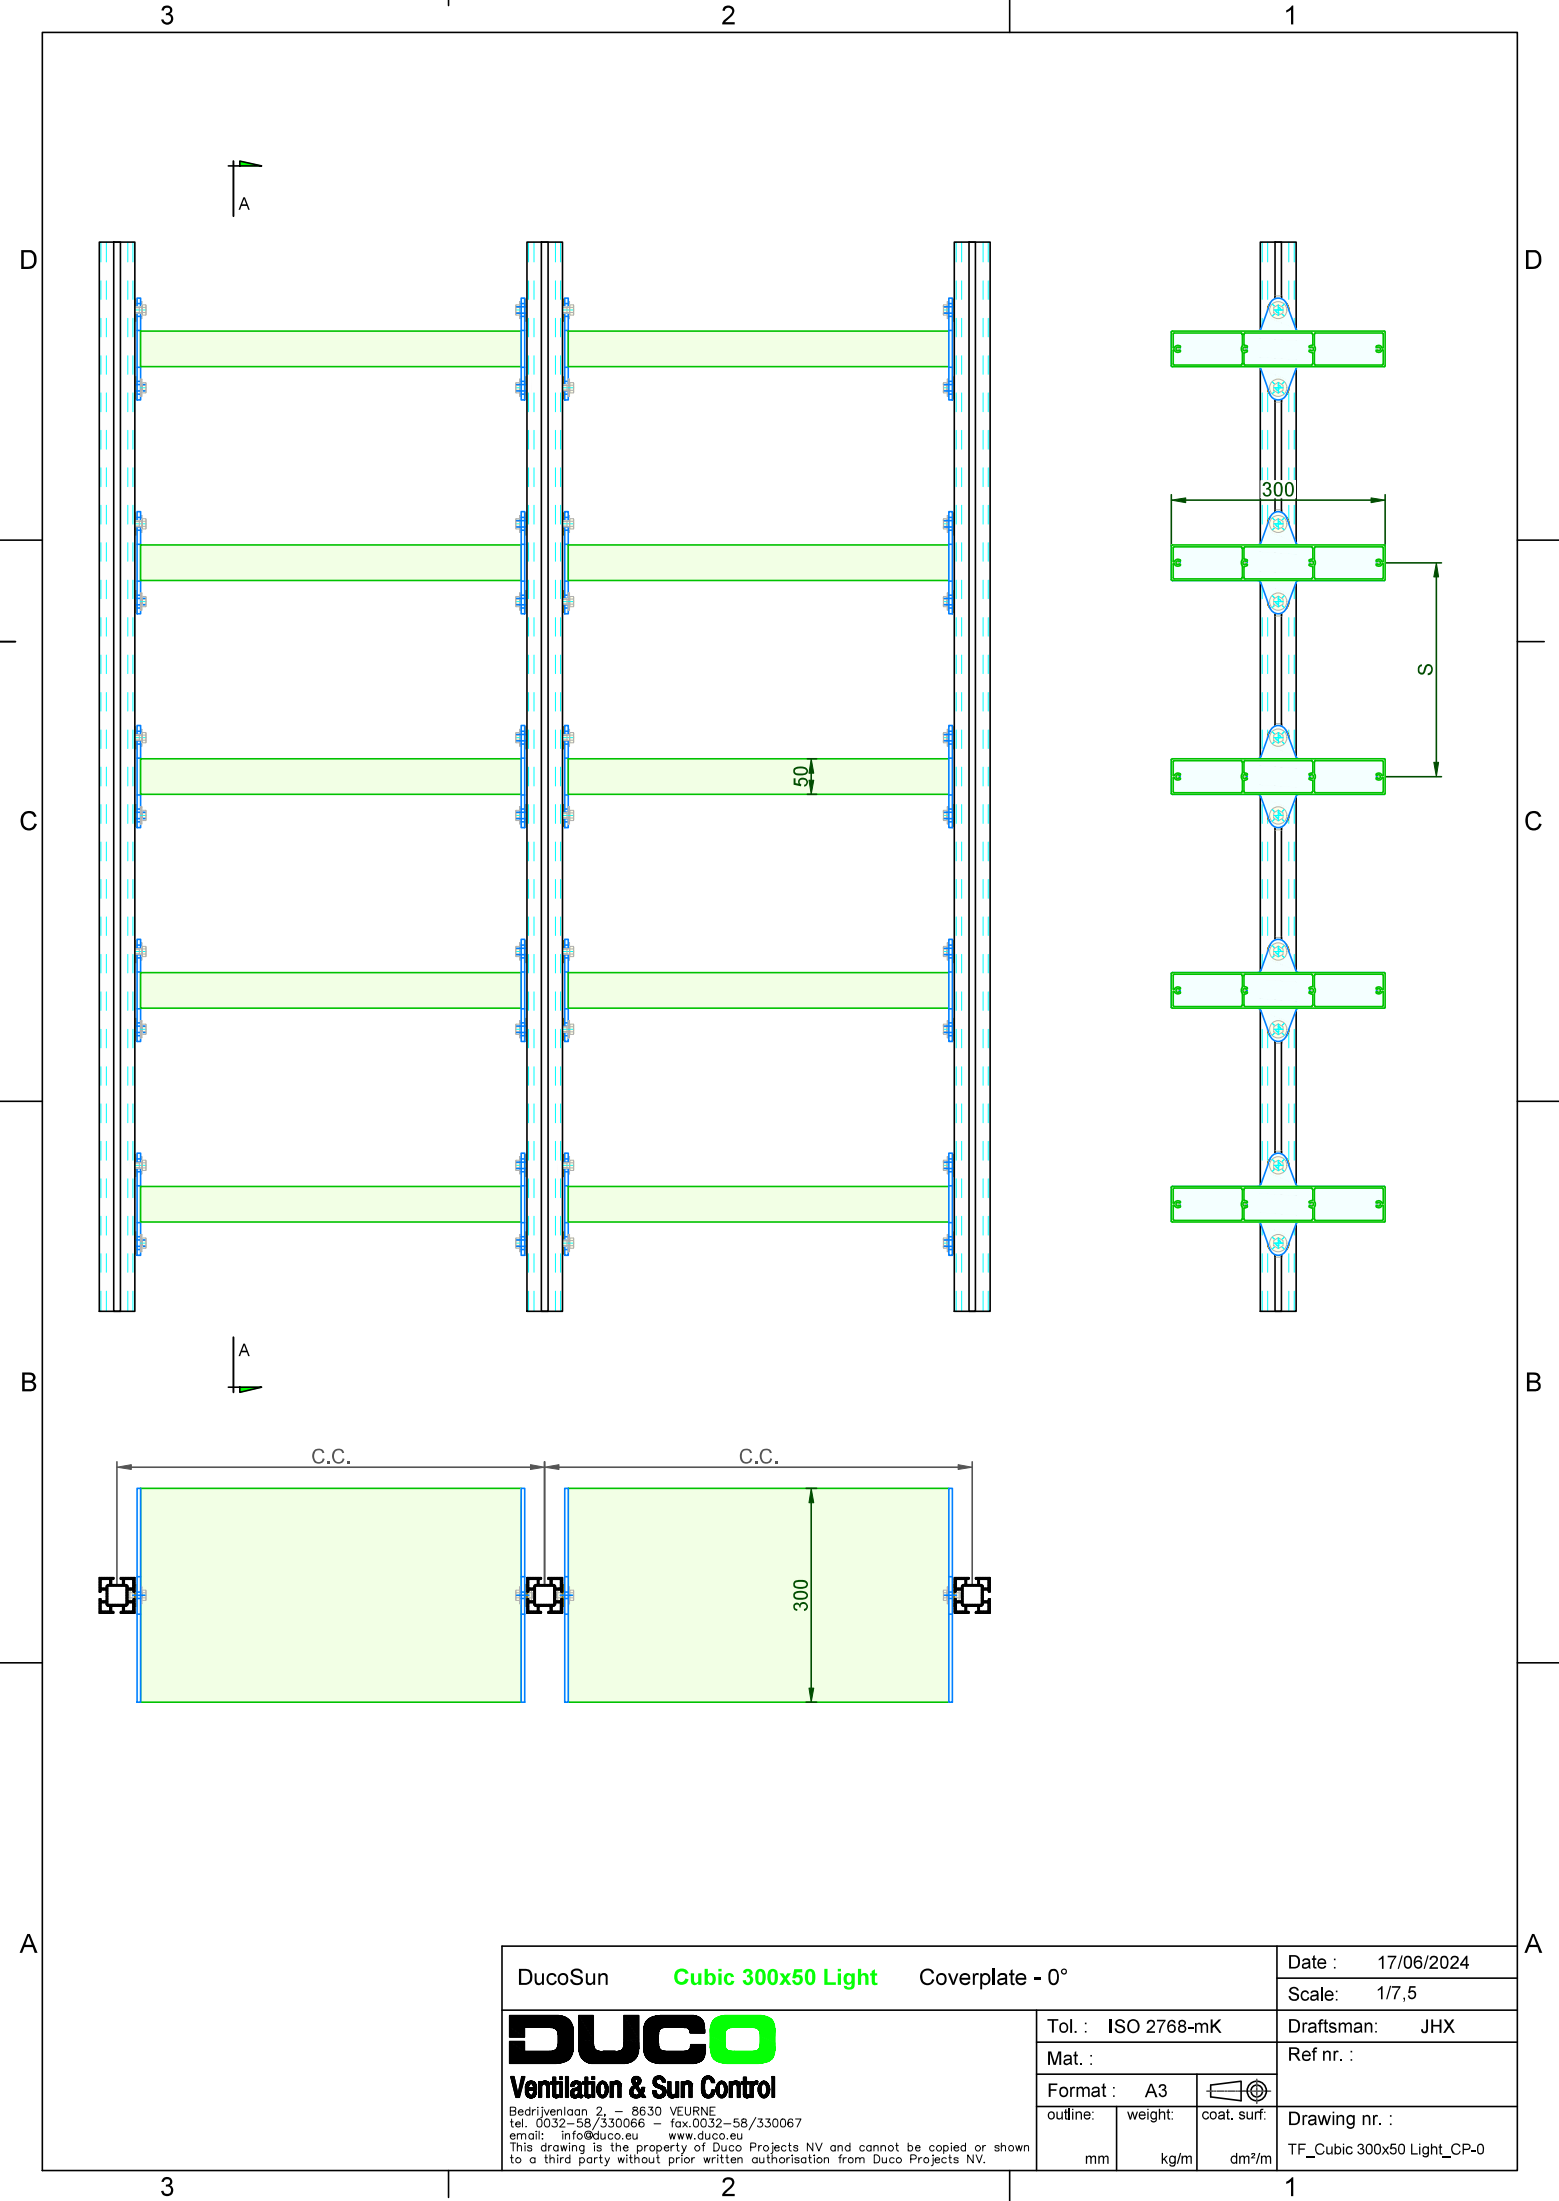

DucoSun Cubic 300x50 Light Coverplate - 0°			Date : 17/06/2024		
			Scale: 1/7,5		
DUCO Ventilation & Sun Control Bedrijvenlaan 2 - 8630 VEURNE tel. 0032-58/330066 - fax.0032-58/330067 email: info@duco.eu www.duco.eu This drawing is the property of Duco Projects NV and cannot be copied or shown to a third party without prior written authorisation from Duco Projects NV.			Tol. : ISO 2768-mK		Draftsman: JHX
			Mat. :		Ref nr. :
Format : A3			Drawing nr. : TF_Cubic 300x50 Light_CP-0		
outline:	weight:				
mm	kg/m	coat. surf:			
		dm²/m			