



TECHNICAL DATA SHEET



TYPE	DucoSun Cubic 400x48 - Coverplate 0°
DESCRIPTION	External permanent solar shading system with fixed blades
SHAPE OF BLADE	Rectangular louvre blade
DIMENSIONS	400 mm x 48 mm
MATERIAL	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5 mm
ANGLE OF BLADE	0°
PITCH OF BLADE (S)	To be determined according to project
MAX. SPAN	3750 mm @ 800Pa
COVERPLATES	Aluminium lasered coverplates - thickness 5 mm (AlMgSi0,5)
FIXATION BLADE	Self-tapping countersunk bolt M6x30 DIN7500-MZ (AISI 304)
FIXATION COVERPLATE	On Duco mullion or directly against the underlying structure. (Ø9)
REACTION TO FIRE	A2-s1,d0 (EN13501-1)
SURFACE TREATMENT	- Standard aluminium anodised (15-20µm) according Qualanod - Polyester powder coated (60-80µm) according Qualicoat Seaside type A

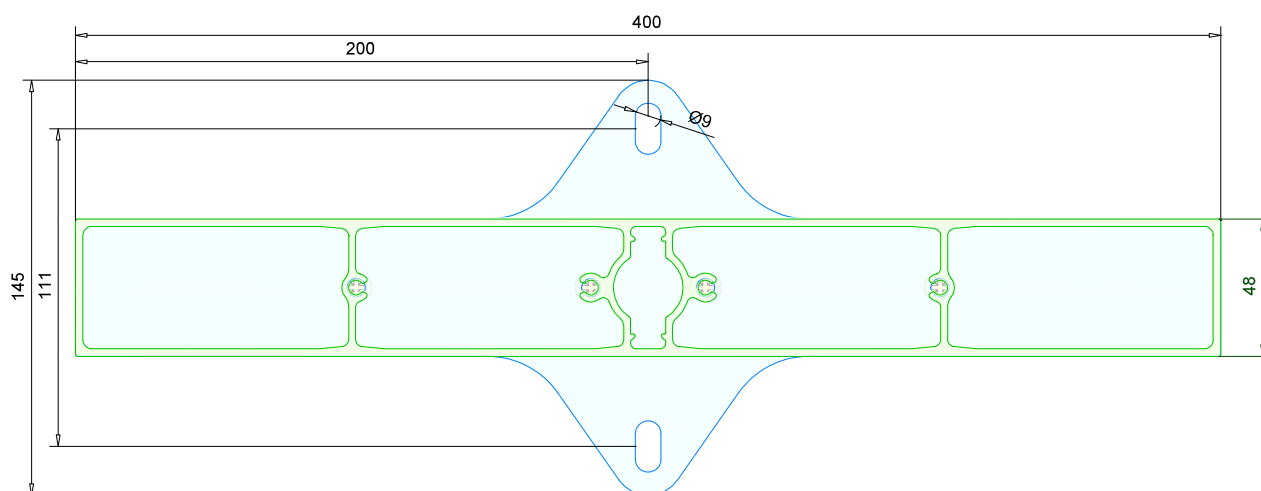

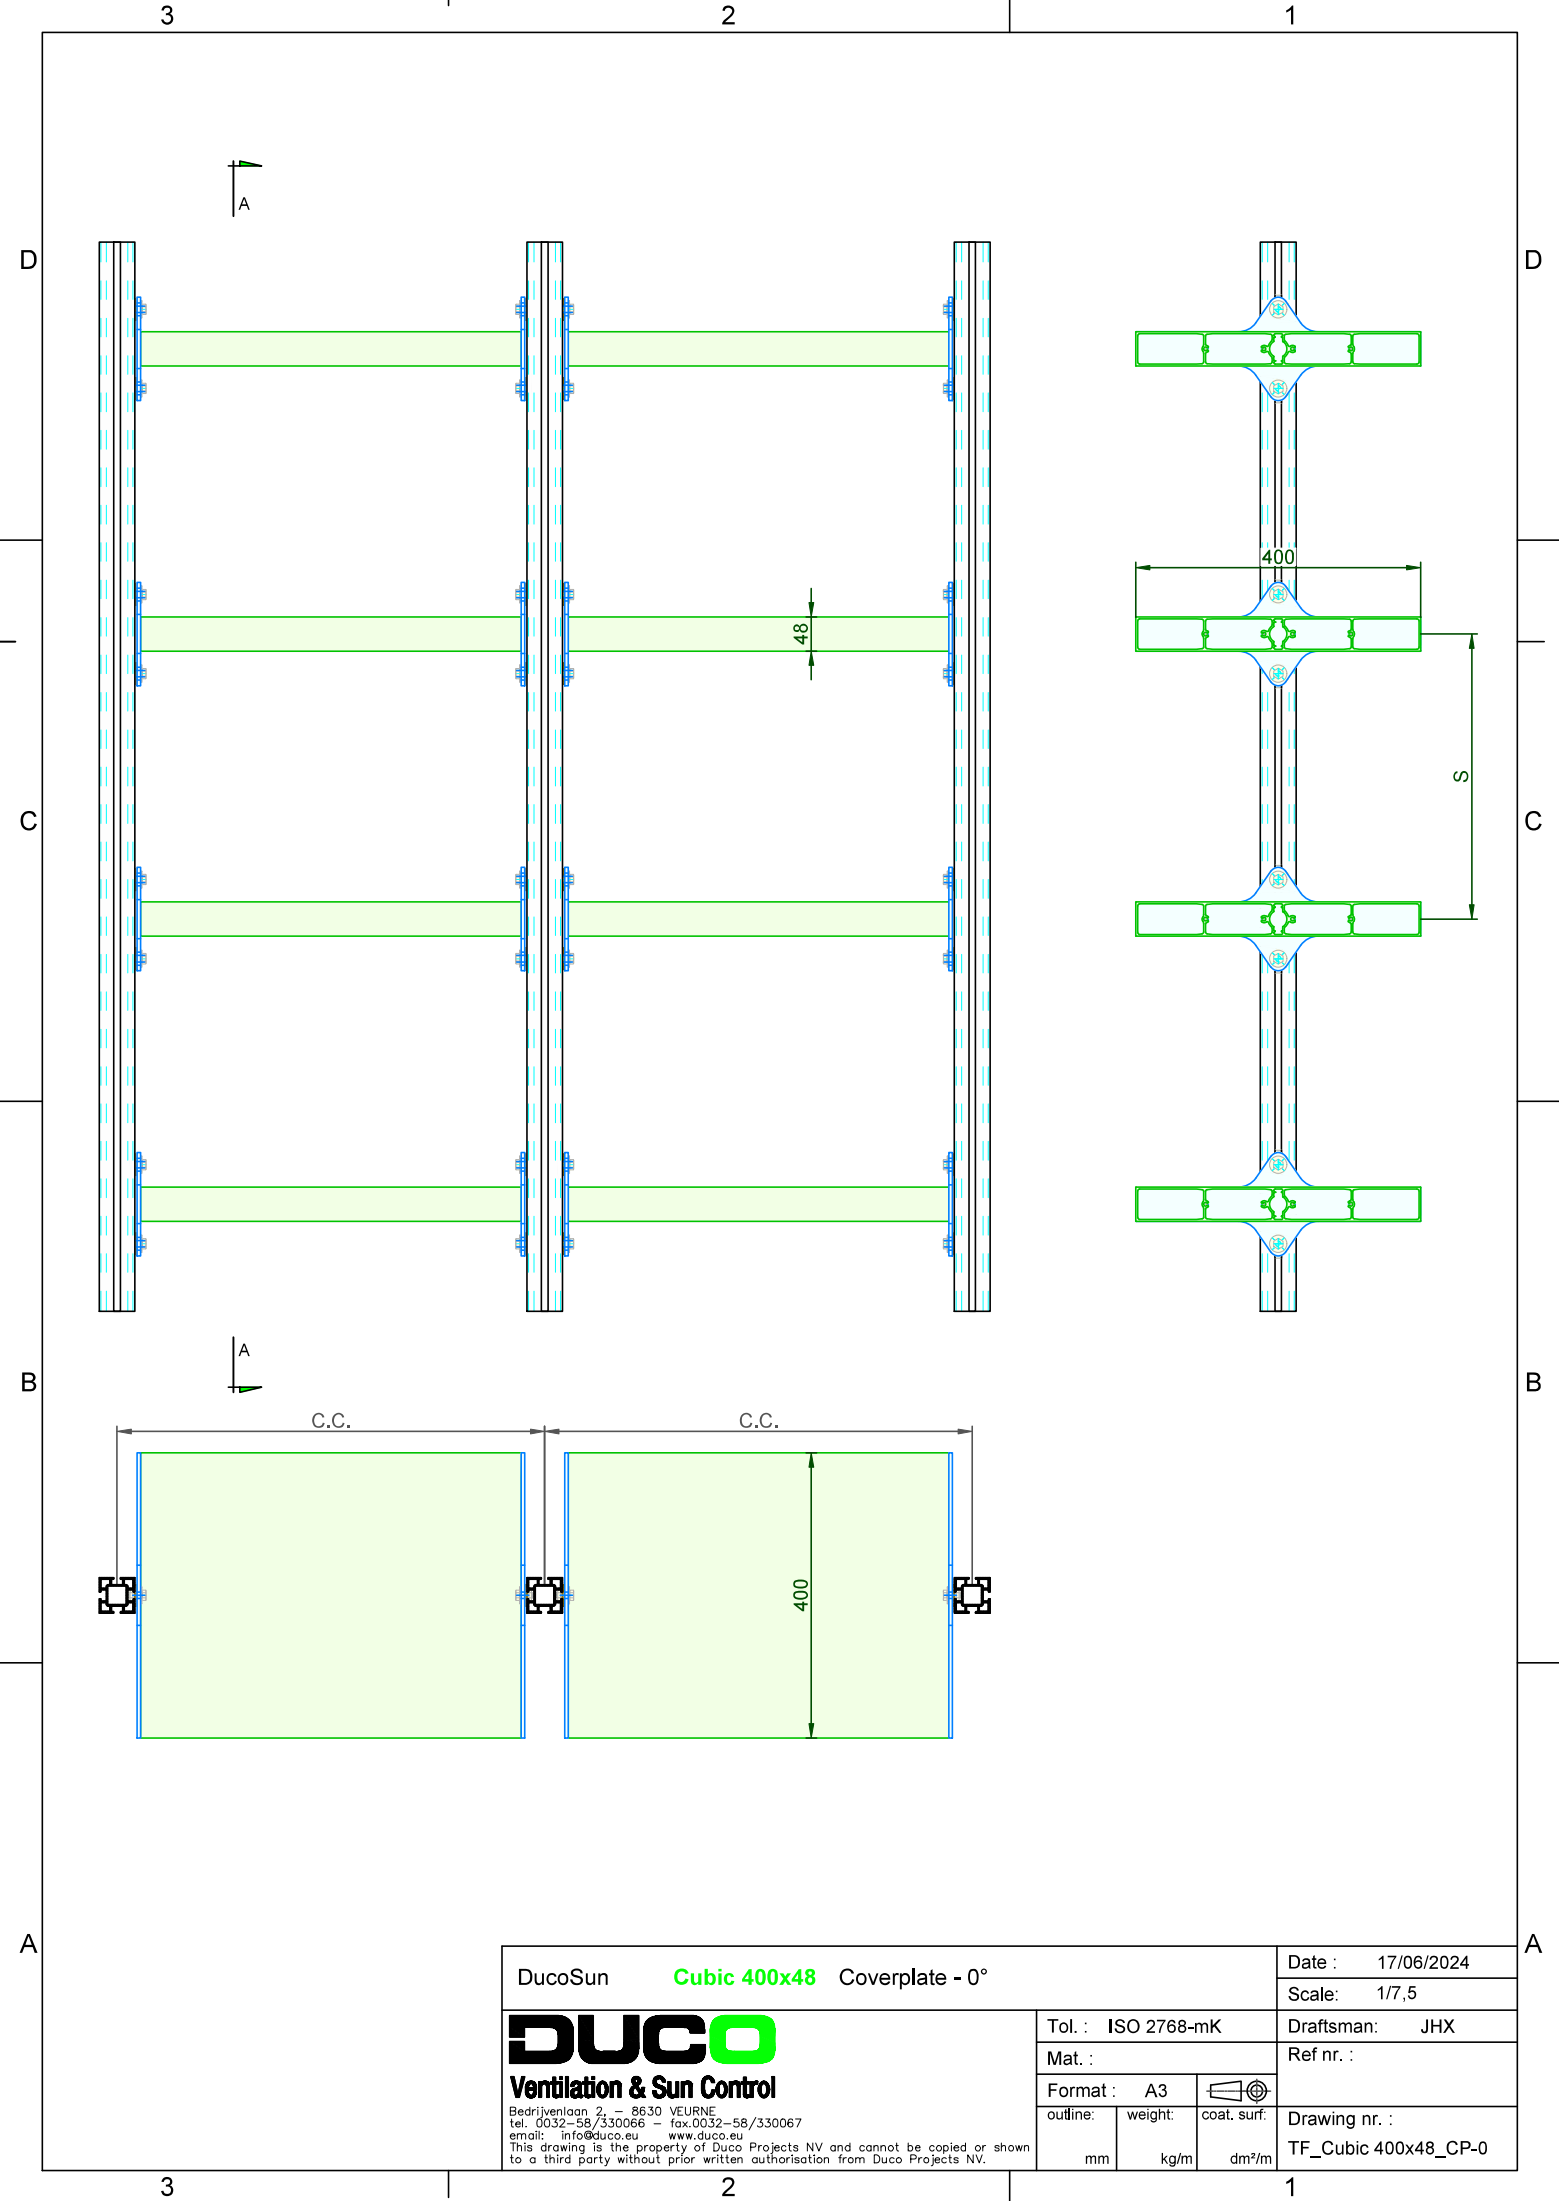

DucoSun			Cubic 400x48			Coverplate - 0°			Date : 17/06/2024					
									Scale: 1/7,5					
DUCO Ventilation & Sun Control Bedrijvenlaan 2, – 8630 VEURNE tel. 0032-58/330066 – fax.0032-58/330067 email: info@duco.eu www.duco.eu This drawing is the property of Duco Projects NV and cannot be copied or shown to a third party without prior written authorisation from Duco Projects NV.									Tol. : ISO 2768-mK			Draftsman: JHX		
									Mat. :			Ref nr. :		
									Format : A3			Drawing nr. : TF_Cubic 400x48_CP-0		
									outline: mm	weight: kg/m	coat. surf: dm²/m			