

# TECHNICAL DATA SHEET



Type	<b>DucoGrille Solid G30Z Barrier Load-P2 + options</b>	
<b>DESCRIPTION</b>	Reinforced louvre grille with punched blades.	
<b>SHAPE OF BLADE</b>	30Z punched blades (P2) height 21mm x width 18mm	
<b>PITCH</b>	37,5 mm	
<b>FRAME WIDTH</b>	45 mm	
<b>EQUAL LEG OUTER FRAME</b>	15 mm	
<b>FRAME DEPTH</b>	42 mm	
<b>MIN. DIMENSIONS</b>	Width 200mm, Height 200mm. Exception on request.	
<b>REACTION TO FIRE</b>	A2-s1,d0 (EN13501-1)	
<b>MESH</b>	Aluminium extrusions are perforated and act as bird mesh - standard with insect mesh 2.3 x 2.3 mm	
<b>OPTIONS</b>	incl. extra drip tray on the back of the frame test result situation installed in wall	
<b>MATERIAL</b>	Aluminium : EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm	
<b>SURFACE TREATMENT</b>	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request	
<b>VISUAL FREE AREA</b>	86% per meter of punching	
<b>PHYSICAL FREE AREA</b>	48%	
<b>AIR FLOW DATA</b>	(EN13030)	+ options
	Ce	0,232
	K-factor intake	18,58
	Cd	0,266
	K-factor exhaust	14,13
<b>WATER RESISTANCE</b>	(EN13030)	+ options
	v = 0 m/s	B
	v = 0,5 m/s	B
	v = 1 m/s	B
	v = 1.5 m/s	B
	v = 2 m/s	C
	v = 2.5 m/s	D
	v = 3 m/s	D
	v = 3,5 m/s	D
<b>IMPACT RESISTANCE</b>	EN13049	Class 5
	NF P08-302	Class H2/C2
<b>FALL-TROUGH PROTECTION</b>	B03-004	Class C4
	NEN-EN1991-1-1	Class A/B/F/G
	NF P01-013	Class A/B (Width < 600 mm)
	BS6180	Class XI

3

2

1

D

D

C


C

B

B

A

A

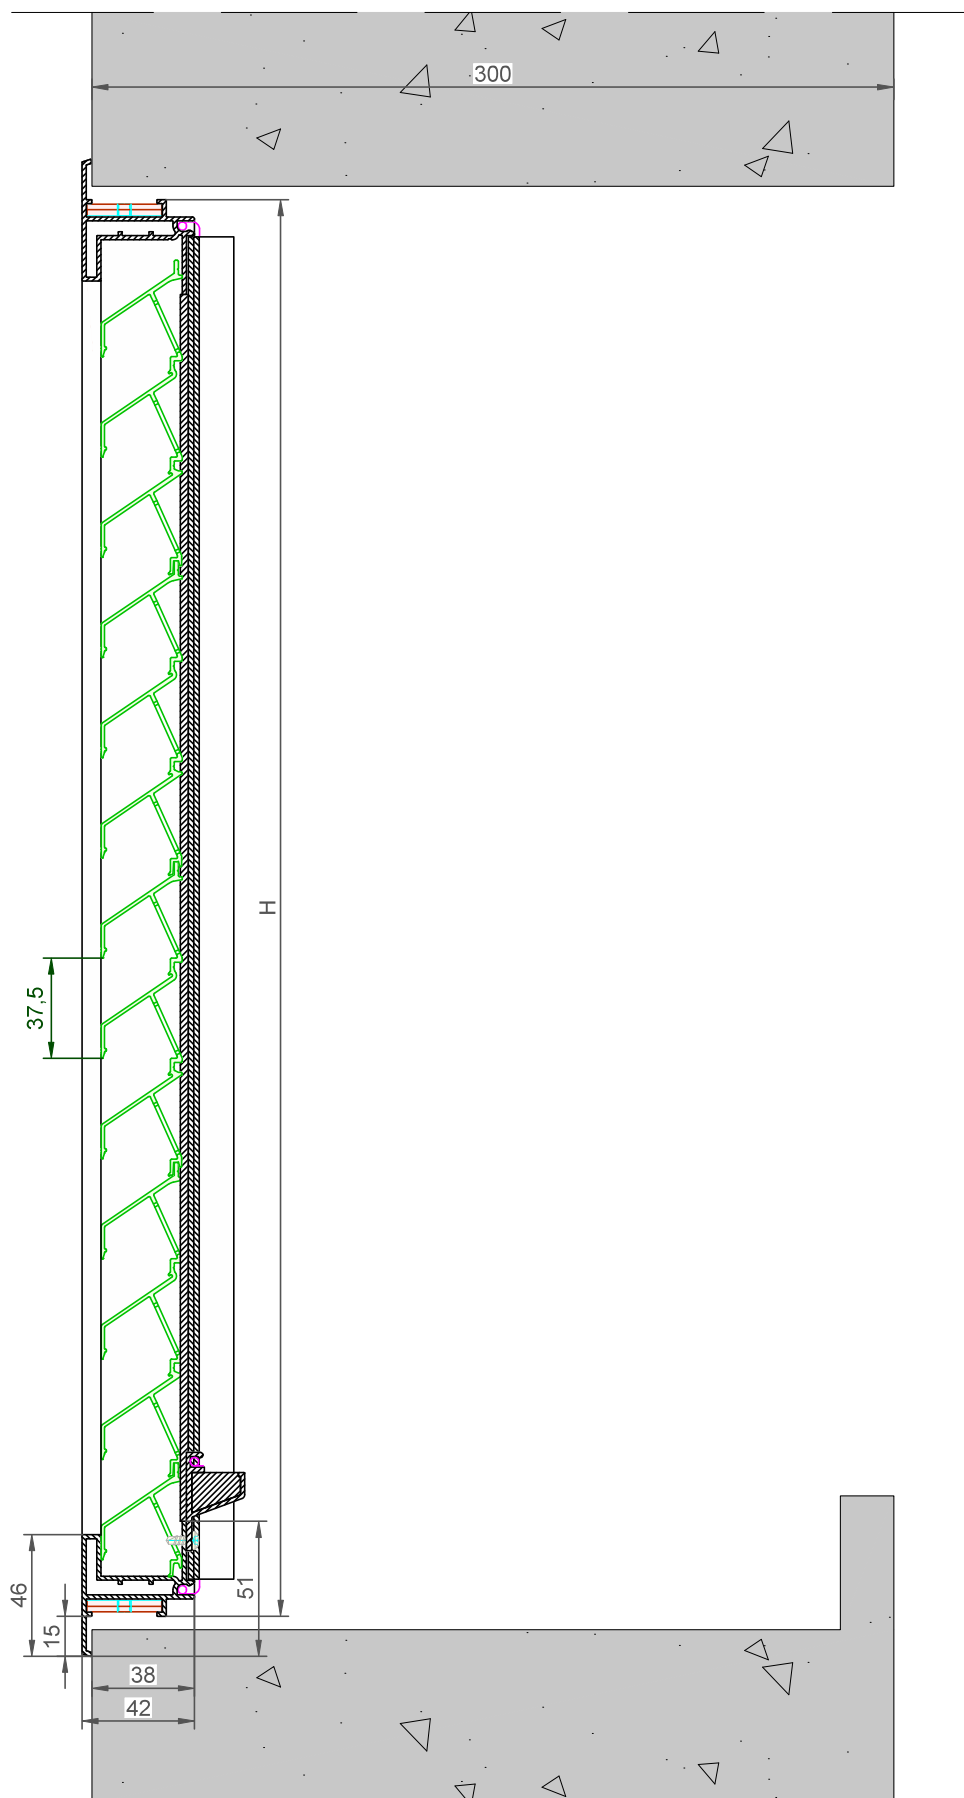

DucoGrille Solid **G30Z Barrier Load - P2 + Options**

Datum : 31/10/2023

Schaal : 1:2

**DUCO**  
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE  
tel. 0032-58/330066 - fax.0032-58/330067  
email: info@duco.eu www.duco.eu

Deze tekening is eigendom van Duco Projects en mag niet gekopieerd  
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : SDN/RTN/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm<sup>2</sup>/m

DGS-G30Z-BL-P2 + Options

3

2

1