

# TECHNICAL DATA SHEET



Type	DucoWall Screening 70-75																			
DESCRIPTION	Continuous louvre wall																			
SHAPE OF BLADE	Screening 70																			
PITCH	75 mm																			
BLADE HEIGHT	113 mm																			
BLADE DEPTH	82 mm																			
INSTALLATION DEPTH	with mullion 40/21 (double)                      95 mm with mullion 40/70 double                        145 mm with mullion 40/100 double                       175 mm																			
MAX. BLADE LENGTH	6000 mm																			
MAX. SPAN	2400 mm @ 800Pa																			
STARTING DIMENSION	12 mm																			
REACTION TO FIRE	A2-s1,d0 (EN13501-1)																			
MESH	standard without insectmesh frame																			
MATERIAL	Aluminium :                      EN AW-6063 T66 (EN 573-3) Profile thickness : min. 1,5mm																			
SURFACE TREATMENT	- standard aluminium anodised (15-20µm) according Qualanod - polyester powder coated (60-80µm) according Qualicoat Seaside type A - specific RAL codes and/or textured paint on request																			
VISUAL FREE AREA	53%																			
PHYSICAL FREE AREA	37%																			
AIR FLOW DATA	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">(EN13030)</th> <th style="width: 50%;">standard</th> </tr> </thead> <tbody> <tr> <td>Ce</td> <td>0,182</td> </tr> <tr> <td>K-factor intake</td> <td>30,19</td> </tr> <tr> <td>Cd</td> <td>0,2</td> </tr> <tr> <td>K-factor exhaust</td> <td>25,00</td> </tr> </tbody> </table>		(EN13030)	standard	Ce	0,182	K-factor intake	30,19	Cd	0,2	K-factor exhaust	25,00								
(EN13030)	standard																			
Ce	0,182																			
K-factor intake	30,19																			
Cd	0,2																			
K-factor exhaust	25,00																			
WATER RESISTANCE	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">(EN13030)</th> <th style="width: 50%;">standard</th> </tr> </thead> <tbody> <tr> <td>v = 0 m/s</td> <td>B</td> </tr> <tr> <td>v = 0,5 m/s</td> <td>C</td> </tr> <tr> <td>v = 1 m/s</td> <td>C</td> </tr> <tr> <td>v = 1.5 m/s</td> <td>C</td> </tr> <tr> <td>v = 2 m/s</td> <td>D</td> </tr> <tr> <td>v = 2.5 m/s</td> <td>D</td> </tr> <tr> <td>v = 3 m/s</td> <td>D</td> </tr> <tr> <td>v = 3,5 m/s</td> <td>D</td> </tr> </tbody> </table>		(EN13030)	standard	v = 0 m/s	B	v = 0,5 m/s	C	v = 1 m/s	C	v = 1.5 m/s	C	v = 2 m/s	D	v = 2.5 m/s	D	v = 3 m/s	D	v = 3,5 m/s	D
(EN13030)	standard																			
v = 0 m/s	B																			
v = 0,5 m/s	C																			
v = 1 m/s	C																			
v = 1.5 m/s	C																			
v = 2 m/s	D																			
v = 2.5 m/s	D																			
v = 3 m/s	D																			
v = 3,5 m/s	D																			

3

2

1

D

D

C


C

B

B

A

A

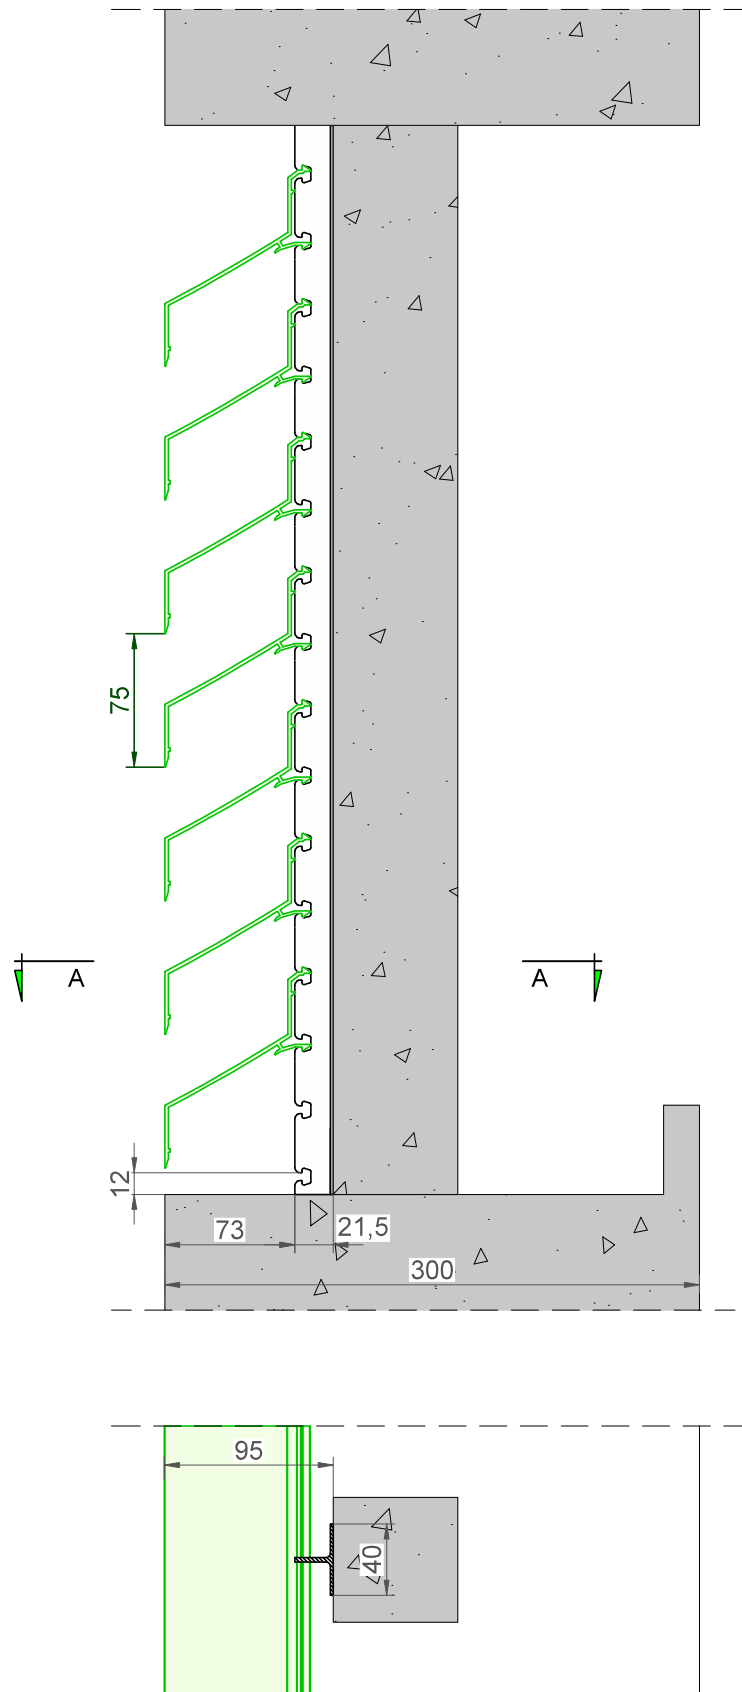

DucoWall Screening 70/75 Draagprofiel 40/21

Datum : 24/05/2022

Schaal : 1:3

**DUCO**  
Ventilation & Sun Control

Bedrijvenlaan 2 - 8630 VEURNE  
tel. 0032-58/330066 - fax.0032-58/330067  
email: info@duco.eu www.duco.eu

Deze tekening is eigendom van Duco Projects en mag niet gekopieerd  
noch getoond worden aan derden zonder schriftelijke toestemming

Tol. : ISO 2768-mK

Getekend : LNT/JHX

Mat. :

Ref nr. :

Formaat : A3



omtrek

gewicht

lakoppervl.

Tekening nr. :

mm

kg/m

dm<sup>2</sup>/m

DWScreening-70/75 DP 40/21

Zonder dorpel, geen toplamel beschikbaar

3

2

1