

DucoBox Energy Premium

The **QUIETEST** MVHR!



Extremely quiet

Lowest sound power
(55 dB at 325 m³/h)



2-zone control

Up to 40%
energy savings



Auto calibration



Save time = Save money

DUCO

We inspire at www.duco.eu

DUCOBOX ENERGY PREMIUM IN THE SPOTLIGHT

The **DucoBox Energy Premium** takes MVHR-systems to the next level. Ideal for installations in an “energy-neutral” or “passive” home. The unit comes with automatic calibration and an (optional) integrated 2-zone operation, based on time- or demand control (CO₂ / humidity). The DucoBox Energy Premium ensures ultra-quiet, intelligent and energy-conscious operations!

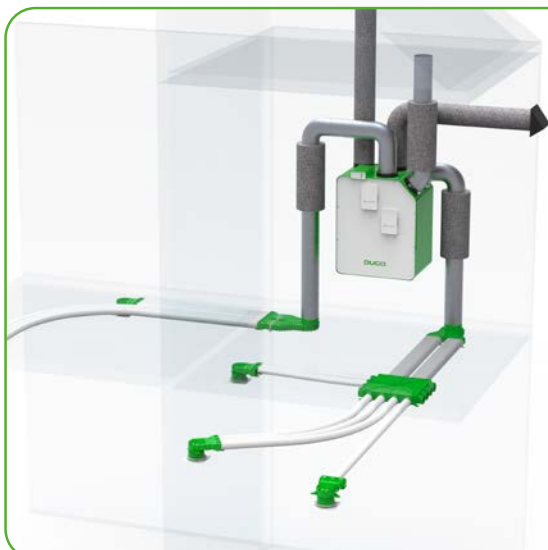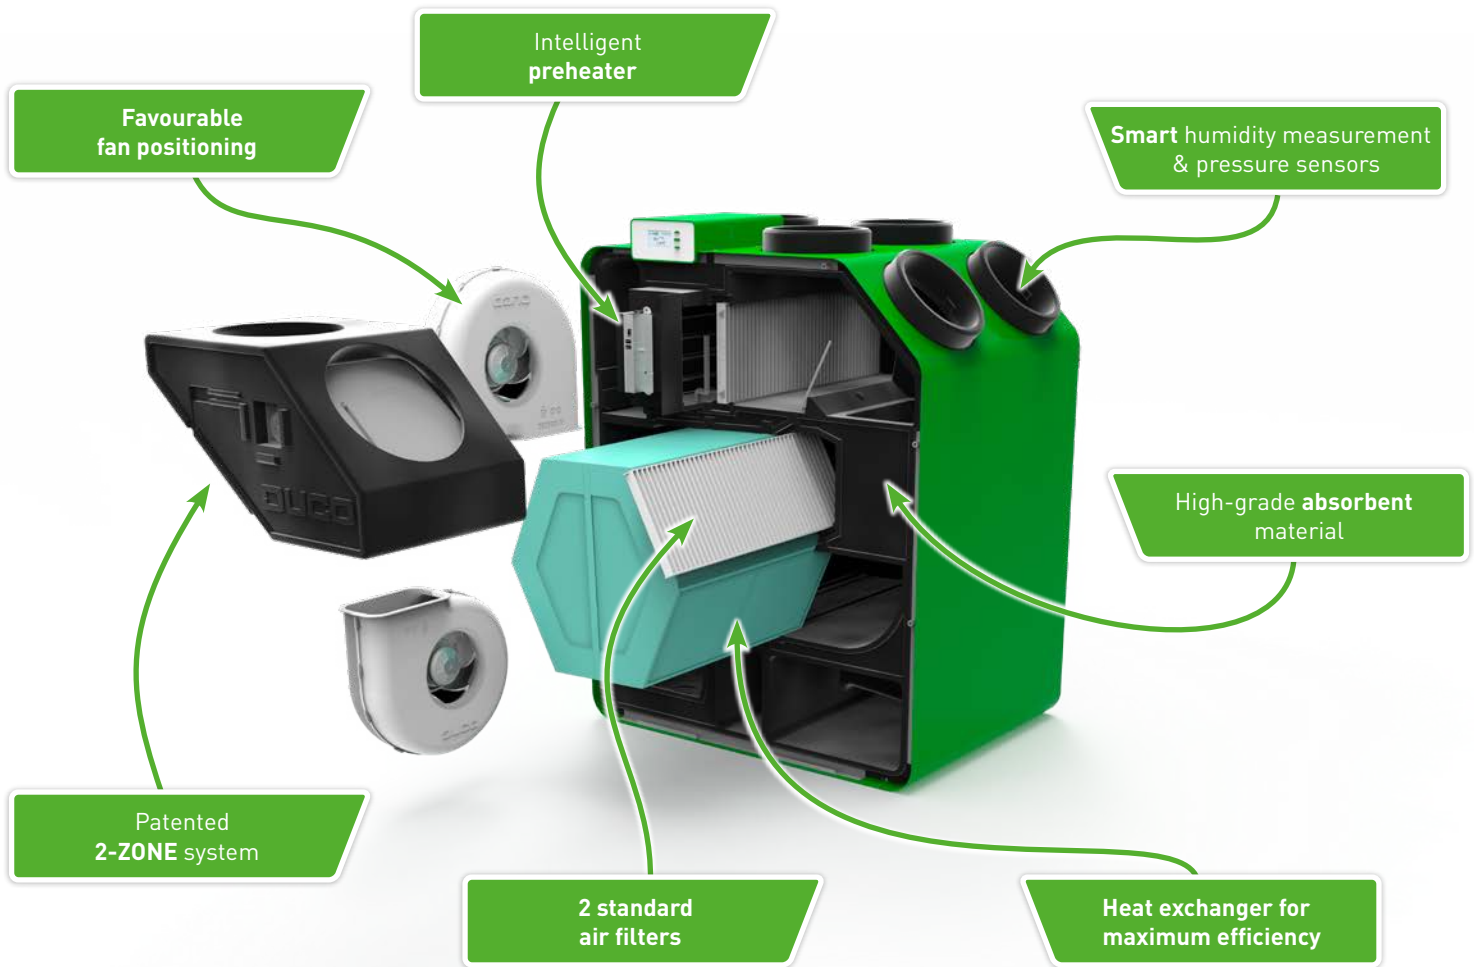

DucoFlex

Complete **air ducting system** for all ventilation systems
(extraction only and MVHR)



✓
'Click & Go' system
Flexible ducting with convenient click system

✓
'Enjoy the silence'
Meets the most stringent requirements

✓
Easy setup
Limited number of fittings and accessories

The most quiet MVHR-solution!

The favourable positioning of the fan as well as the use of high-grade absorbent material and a steel casing guarantee a **whisper-quiet operation**, especially in the living areas where this matters most (bedrooms and living room)!



2-zone control (optional)

The **day and night zone** are being controlled separately by a valve which is integrated in the machine itself. Steering can happen based on time-schedules or based on CO₂ or humidity measurements, thereby **significantly improving the energy efficiency!**



AUTO calibration

The automatic calibration, which is based on the principle of constant pressure, allows for a very **fast and accurate calibration**. This easily reduces **set-up time to 50%**! This quickly means a **saving of 40€ on the installation cost** for a standard calibration!






Distinguishing features

- ★ **Quietest** sound power (air supply) on the market
- ★ Patented **2-zone control** guarantees maximum energy efficiency (60.5 W)
- ★ Automatic calibration reduces setup time by **at least 50%**
- ★ **Modular** surface mounted, all components are accessible at the front of the device
- ★ **Smart communication** via connection through REST API (locally or via the cloud) or Modbus TCP
- ★ Generate a **ventilation report** immediately after calibration through the **Duco Installation App**

A DucoBox for every home



Choose the DucoBox that fits your requirement based on the following possibilities:

Ventilation capacity	Two types of units with extraction and supply (at 150 Pa): either up to 325 m³/h , either up to 400 m³/h .
Zonal control	Available with or without the internally integrated 2-zone valve allowing 2-zone control.
Frost protection	Via unbalance or combined with pre-heater .
Left / right version	The sloping side can be either left or right (on the slope side, one finds SUP "zone 1" and ETA connection). 
Type of plug	With plug type G  (UK) or plug type F  (other European countries).


2-ZONE VENTILATION SYSTEM

Sensors closely monitor the occupant's presence and activity in the dwelling by means of CO₂ and/or humidity-sensors. This allows for an **automated detection** of when to ventilate, where to ventilate (day-zone or night-zone) and how much to ventilate.

Controlling both zones separately with a built-in valve substantially reduces consumption by the EC-fans, which translates into the **highest energy reduction** and an **A+ energy label**.

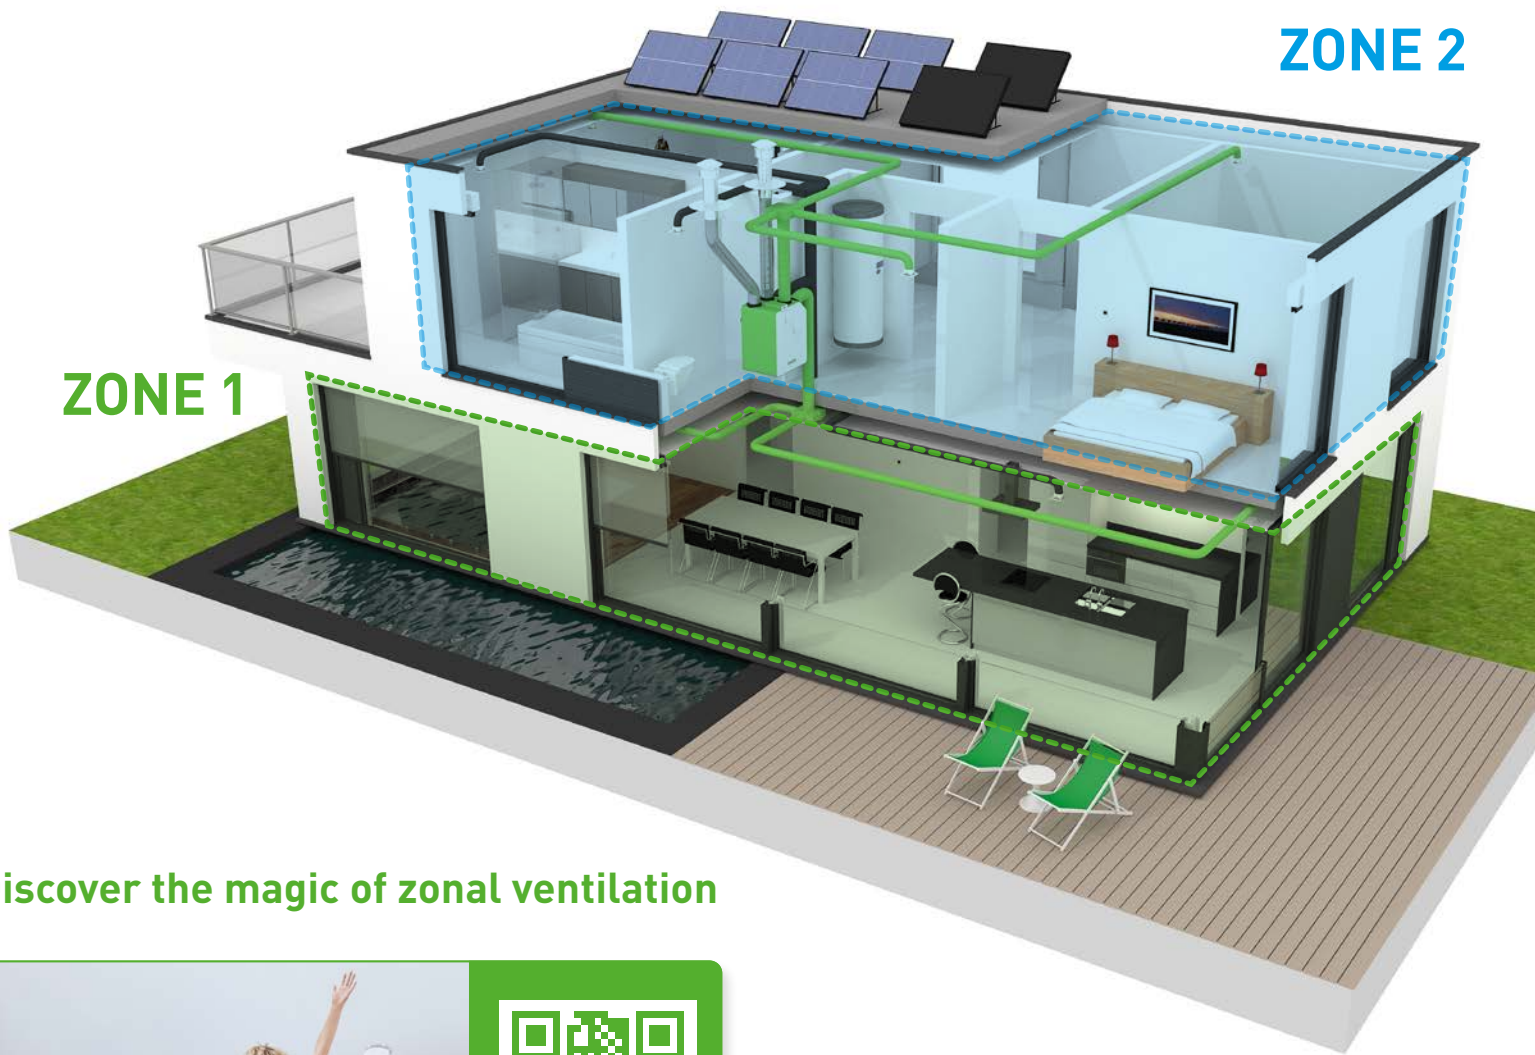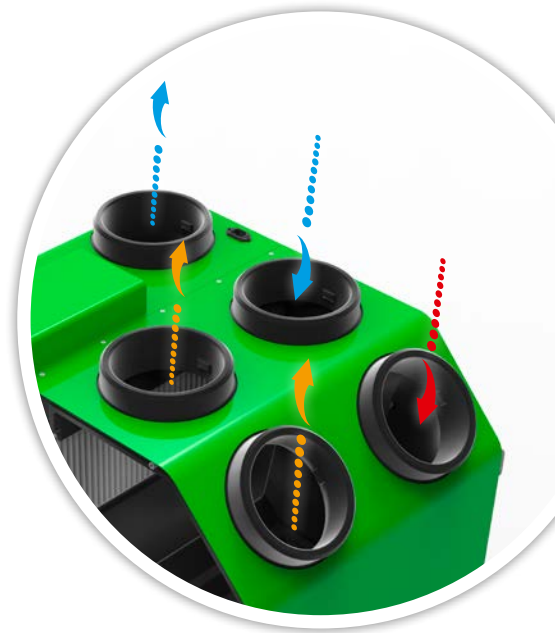

Discover the magic of zonal ventilation

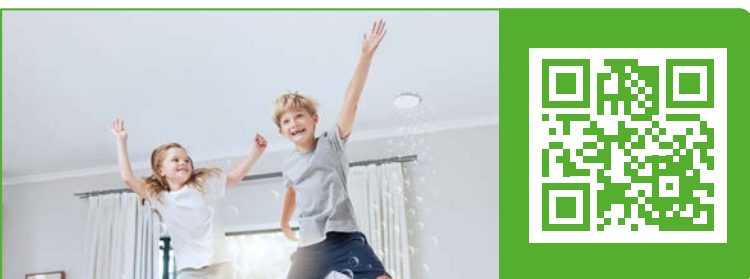

duco.eu/zonal-ventilation

DUCOBOX ENERGY PREMIUM IN FIGURES

Physical characteristics

Width x Height x Depth (mm)	740 x 957 x 585 mm
Casing	Coated sheet steel
Colours	White + green
Connections	Internal diameter: Ø 160 mm External diameter: Ø 190 mm
Condensate drain	Ø 32 mm (1 ¼")
Heat exchanger	PET / Polystyrene
Material of inside section	EPP / PP / ABS
Weight	47 kg
Power cable length	2 m (to be connected to top of device)
Fitting	Wall mounting (standard) Floor mounting as an option using mounting chair

Acoustic properties

Measurement #	Flow rate Qv m³/h	Pressure Pa	Absorbed power P W	SFP Wh/m³	Noise level Lw*		
					emission from housing dB(A)	supply dB(A)	extraction dB(A)
DucoBox Energy Premium 400							
1	400	150	180	0,45	52,5	57,0	55,0
2	350	150	135	0,39	51,0	56,0	53,5
3	300	150	100	0,33	51,0	55,0	50,0
4	400	100	159	0,40	52,0	56,5	54,5
5	350	100	120	0,34	51,5	55,5	51,5
6	300	100	93	0,31	48,0	52,5	50,5
7	280	50	68	0,24	46,0	47,0	46,0
8	250	50	55	0,22	44,0	46,0	43,0
9	200	50	37	0,19	39,0	44,5	40,0
10	200	25	35	0,18	36,0	40,5	40,0
11	150	25	26	0,17	31,0	36,0	39,5
12	100	25	16	0,16	28,5	35,5	39,0
DucoBox Energy Premium 325							
1	325	150	118	0,36	52,0	54,5	51,0
2	300	150	100	0,33	51,0	55,0	50,0
3	250	150	80	0,32	46,5	48,5	48,0
4	325	100	104	0,32	51,0	56,5	50,5
5	300	100	93	0,31	48,0	52,5	50,5
6	250	100	67	0,27	45,0	46,5	46,0
7	227,5	50	47	0,21	41,0	45,5	41,5
8	200	50	37	0,19	39,0	44,5	40,0
9	150	25	26	0,17	31,0	36,0	39,5
10	100	25	16	0,16	28,5	35,5	39,0

* Casing emission from housing measured in accordance with ISO 3741:2010
Supply and extraction noise level in accordance with ISO 5135:1997 (with channel correction)

Electrical characteristics

Maximum power at 150 Pa	DucoBox Energy Premium 325: 120 W (2 x 60 W) DucoBox Energy Premium 400: 183 W (2 x 91,5 W)
Maximum heater power	1000 W
Power supply	230 V, 50 Hz via 3-wire supply cable with safety plug
Type of motor	DC
IP class	IP40
Efficiency in accordance with EU 1253/2014	Types 325: 89% Types 400: 88%

Miscellaneous characteristics

Energy class	Control factor 0.65: A+ Other: A
Filters	Filter supply air (175 x 500 x 25 mm) Standard: ISO 16890 Coarse 65% (≈ G4) Optional: ISO 16890 ePM1 55% (≈ F7) Filter exhaust air (175 x 500 x 25 mm) Standard: ISO 16890 Coarse 65% (≈ G4)
Summer by-pass	Fully (100% modulating)
Frost protection	Imbalance Optional via proportional heater
Fans	EC fan with backward curved blades
Automatic calibration	Yes (with constant flow)
Operation	Integrated display Use via remote controls and Room CO ₂ or Humidity Sensors
Sensors	Integrated: pressure, temperature, humidity (via optional Boxsensor), onboard switch sensor External: CO ₂ (via optional Sensor), Humidity (via optional Sensor), external Switch Sensor (voltage-free input) (optional)
Communication	Standard: DUCO RF, DUCO Wired, Switch Sensor Expandable with Duco Connectivity Board: connection possible via REST API (locally or via the cloud) or Modbus TCP

SERVICE PLEASE!

100% SERVICE

Tailored advice

Thanks to **years of experience** and know-how in the field of natural ventilation, our engineering department has all the expertise to offer the most suitable installation for your project.

www.duco.eu/yourproject



DUCO INSTALLATION APP

Ready-made ventilation report

Unburdening the installer is a priority at DUCO. Thanks to the Duco Installation App, the installer not only gets **step-by-step guidance during the calibration** of the ventilation system, but is also offered a solution to deliver a ventilation report quickly and easily.

en.duco.eu/duco-installation-app



CATALOGUE

Your guide to ventilation systems

Are you looking for a user-friendly tool to guide you quickly and simply through **DUCO's Demand-Controlled Ventilation Systems and associated components**? Then the DUCO Catalogue is the solution of choice, bundling all information accurately in a single document!

www.duco.eu/catalogue



LET'S CONNECT! SEND US YOUR PROJECT!

DUCO offers project support from A to Z. Contact one of our advisers (digitally).



SCAN the QR code
or visit
www.duco.eu/yourproject

DUCO

We inspire at www.duco.eu