


# TECHNICAL DATA SHEET

## DucoBox Energy Comfort D400 (UK)

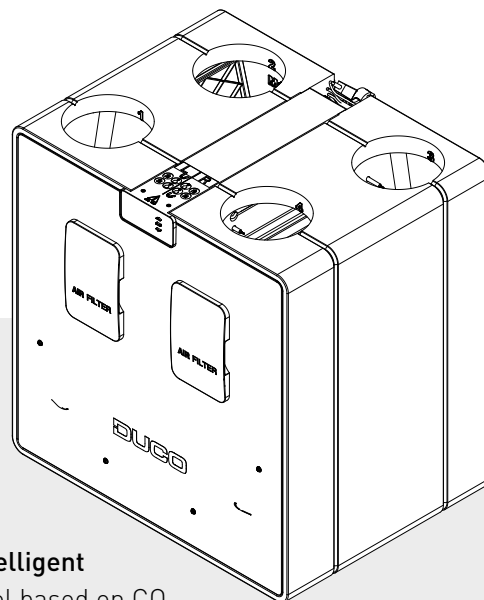

The DucoBox Energy Comfort D400 (UK) is a **mechanical ventilation unit with heat recovery**. Within the DucoBox Energy Comfort range, the left/right exchange is 100 % software-driven thanks to the patented principle of the double by-pass.

The demand control of the DucoBox Energy Comfort D400 results in **intelligent and energy-efficient operation**. Together with the smart demand control based on CO<sub>2</sub> and humidity, the dynamic air distribution filters ensure exceptional efficiency within this compact unit.

The compact and quick-to-install 2-zone valves provide the most energy-efficient result that can be achieved with an MVHR system. Please note that the zone control reduces the noise by **at least 30 %!** Comfort rules!

## Versions

Type	Supply and extraction capacity at 150 Pa	Supply and extraction capacity at 200 Pa	2-zone system	Frost protection	Article number
DucoBox Energy Comfort D400 (UK)	400 m <sup>3</sup> /h	400 m <sup>3</sup> /h	yes (external - optional)	imbalance or external heater (optional)	0000-4757

## Physical characteristics

<b>Width x Height x Depth (mm)</b>	756 x 800 x 584
<b>Casing</b>	Coated sheet steel + EPP
<b>Colours</b>	White + black
<b>Connections</b>	Inner diameter: Ø 180 mm
<b>Condensate drain</b>	Ø 32 mm (1 ¼") (2x)
<b>Heat exchanger</b>	v1: PP - v2: PET/Alu
<b>Material of inside section</b>	EPP / PP / ABS
<b>Weight</b>	31 kg
<b>Power cable length</b>	2 m (from top of unit)
<b>Mounting</b>	Wall mounting (standard) Floor mounting as an option using a support frame

## Electrical characteristics

<b>Maximum power at 50 Pa</b>	118.1 W
<b>Power supply</b>	230 V, 50 Hz via 3-core power cable with earthed plug
<b>Type of motor</b>	DC
<b>IP class</b>	IP40
<b>Energy conversion efficiency</b>	87.9 % (EN 13141-7)

## Miscellaneous characteristics


<b>Energy class</b>	With 2 sensors (control factor 0.65): A+ Other: A
<b>Filters</b>	Dynamic airflow filter supply air (520 x 190 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4) Optional: ISO 16890 ePM1 55 % (=F7)  Dynamic airflow filter exhaust air (520 x 190 x 15 mm) Standard: ISO 16890 Coarse 65 % (= G4)
<b>Fans</b>	EC fan with backward curved blades
<b>Automatic calibration</b>	Yes (constant pressure)
<b>Installer App</b>	Via Duco Connectivity Board (if permanently mounted) Via Duco Installation Kit (mobile application)
<b>Passive cooling</b>	Automatic passive cooling control via 'NightBoost' function
<b>Operation</b>	Integrated display Use via user controllers and CO <sub>2</sub> or Humidity Sensors Optional via smartphone or tablet (provided Duco Connectivity Board in device)
<b>Sensors</b>	<b>Integrated:</b> pressure, temperature, onboard switch sensor <b>External:</b> CO <sub>2</sub> (via optional Room sensor), Humidity (via optional Room sensor or measurement in ETA duct), external Switch Sensor (voltage-free input) (optional)
<b>Communication</b>	<b>Standard:</b> Duco RF, Duco Wired, Switch Sensor <b>Expandable with Duco Connectivity Board:</b> Modbus TCP (local), REST API (local or via cloud) - both via Ethernet or Wi-Fi

## Pressure/flow characteristics

Flow rate (m <sup>3</sup> /h)	Pressure (Pa)	Absorbed power* (W)
367	250	144
350	250	135
300	250	111
275	250	101
400	200	144
350	200	117
300	200	95
275	200	85
400	150	129
350	150	102
300	150	80
275	150	71

\* The values mentioned are an estimate and cannot be used as substantiation.

## DucoBox Energy Comfort D400 (UK)

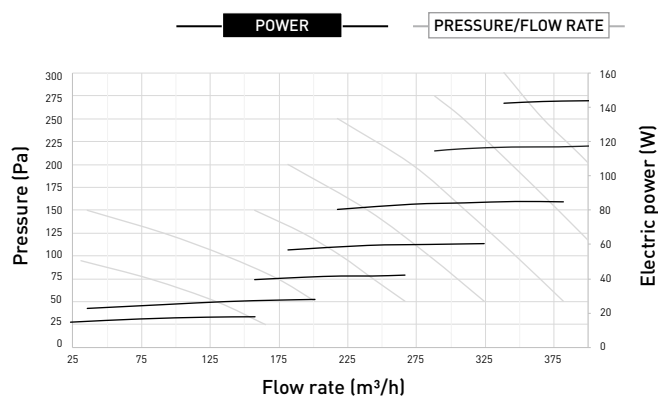

## Systems with rigid ductwork only SAP 2005 results

Exhaust terminal configuration	Specific power of fan (W/l/s)	Heat exchange efficiency (%)
Kitchen + 1 additional wet room	0.61	90
Kitchen + 2 additional wet rooms	0.52	90
Kitchen + 3 additional wet rooms	0.50	90
Kitchen + 4 additional wet rooms	0.53	90
Kitchen + 5 additional wet rooms	0.57	90
Kitchen + 6 additional wet rooms	0.63	89
Kitchen + 7 additional wet rooms	0.73	89

## Systems with rigid ductwork only SAP 2012 results

Exhaust terminal configuration	Specific power of fan (W/l/s)	Heat exchange efficiency (%)
Kitchen + 1 additional wet room	0.56	90
Kitchen + 2 additional wet rooms	0.53	90
Kitchen + 3 additional wet rooms	0.57	90
Kitchen + 4 additional wet rooms	0.65	89
Kitchen + 5 additional wet rooms	0.76	89
Kitchen + 6 additional wet rooms	0.90	88
Kitchen + 7 additional wet rooms	1.08	88

## Sound data

Standards: ISO 5135:2020


Fan Speed	Test mode	Induct Sound Power Levels, dB re. 1pW									
		Octave bands, Hz								LwA	SPL @ 3m
		63	125	250	500	1k	2k	4k	8k		
100%	Supply	78.7	75.6	76.4	75.4	67.7	62.4	57.2	49.7	74.9	57.4
	Extract	72.0	60.6	61.9	55.2	51.4	41.5	35.5	28.6	57.7	40.2
	Breakout	56.7	53.7	62.2	61.8	51.1	47.8	43.7	33.9	60.5	43.0
80%	Supply	76.7	75.7	76.7	68.3	59.8	55.2	49.0	39.2	71.0	53.5
	Extract	64.4	58.8	62.5	50.2	45.6	35.6	28.1	23.9	55.8	38.3
	Breakout	48.2	51.7	62.9	54.6	46.0	43.2	38.7	27.7	57.7	40.2
60%	Supply	74.2	72.6	73.9	61.5	52.7	47.3	40.1	29.1	66.7	49.2
	Extract	62.2	54.8	58.0	43.6	38.5	27.7	22.0	22.7	50.6	33.1
	Breakout	46.3	50.2	53.7	48.9	39.7	37.5	36.2	24.5	49.7	32.2
40%	Supply	70.1	69.0	58.6	50.2	42.3	34.9	25.0	22.8	56.3	38.8
	Extract	57.7	50.6	44.6	33.6	29.0	18.9	18.1	22.6	40.4	22.9
	Breakout	41.7	45.8	45.0	39.7	33.8	30.8	19.7	22.9	41.9	24.4
20%	Supply	61.0	46.1	40.8	35.4	34.6	17.6	18.4	22.9	40.3	22.8
	Extract	52.6	38.0	32.3	23.3	21.0	15.1	17.8	22.7	31.3	13.8
	Breakout	33.8	30.1	31.1	28.5	25.8	16.4	18.3	22.7	30.8	13.3

## Optional accessories


Product	Article number
Siphon flat (Energy)	0000-4376
Duco Connectivity Board	0000-4810
Humidity Sensor (DucoBox Energy Comfort (Plus))	0000-4723
Mounting chair standing (Energy Comfort D400 / Plus)	0000-4740
Filter set 2 x Coarse 65% (Energy Comfort D400 / Plus)	0000-4741
Filter set Coarse 65 % / ePM1 55 % (Energy Comfort D400 / Plus)	0000-4742
Set Coaxial cable 8 m	0000-4418
Pre-Heater DucoBox Energy Comfort (Plus) (UK) 1425 W	0000-4825
External Multizone Valves	Miscellaneous

## Dimensions of DucoBox Energy Comfort D400 (UK)


Front view

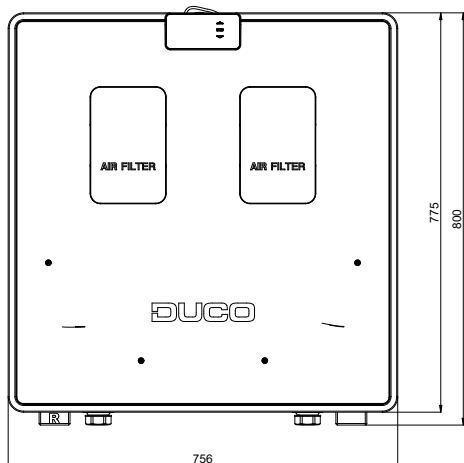


Rear view

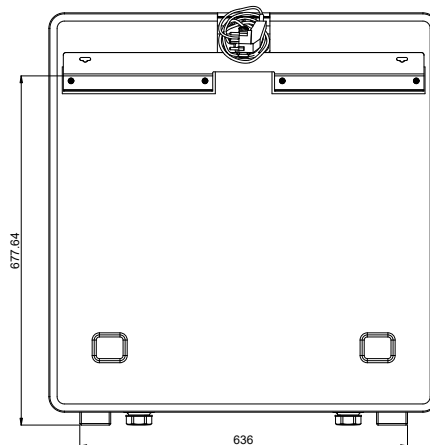

Top view

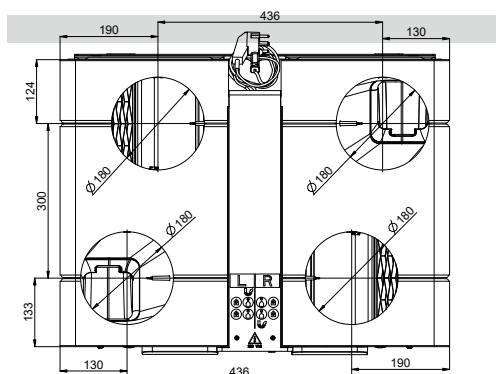

Bottom view

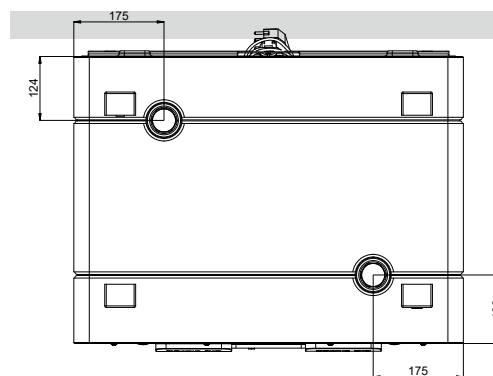

Side view

